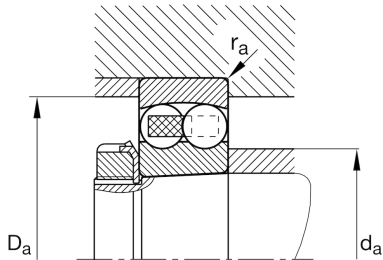
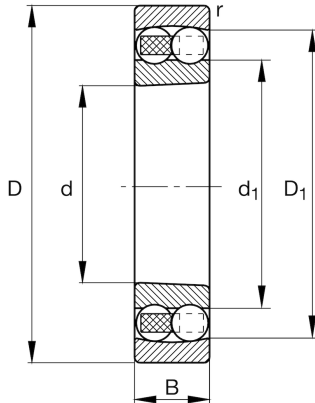
**FAG****1313-K-TVH-C3**

Self-aligning ball bearing

Schaeffler ID:
0384371120030Self-aligning ball bearing 13..-K-TVH,
tapered bore taper 1:12, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	65 mm	Bore diameter
D	140 mm	Outside diameter
B	33 mm	Width
r_{\min}	2,1 mm	Minimum chamfer dimension
C_r	63.000 N	Basic dynamic load rating, radial
C_{0r}	22.900 N	Basic static load rating, radial
C_{ur}	1.420 N	Fatigue load limit, radial
n_G	5.200 1/min	Limiting speed
n_{gr}	5.100 1/min	Reference speed
	2,41 kg	Weight

Dimensions

D_1	118,2 mm	Shoulder diameter outer ring
	H313	Adapter sleeve
d_1	92,7 mm	Shoulder diameter inner ring

Mounting dimensions

$d_{a\min}$	77 mm	Minimum diameter shaft shoulder
$d_{a\max}$	89 mm	Maximum diameter shaft shoulder
$D_{a\max}$	128 mm	Maximum diameter of housing shoulder
$d_{b\min}$	70 mm	Minimum cavity diameter of the sleeve
$B_{a\min}$	5 mm	Minimum cavity width of the sleeve
$r_{a\max}$	2,1 mm	Maximum fillet radius

Calculation factors

e	0,23	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	2,74	Dynamic axial load factor
Y_2	4,25	Dynamic axial load factor
Y_0	2,88	Static axial load factor

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.