



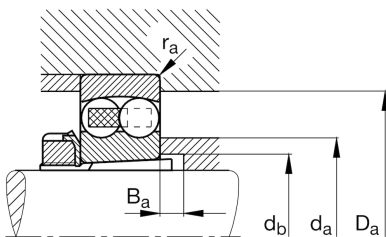
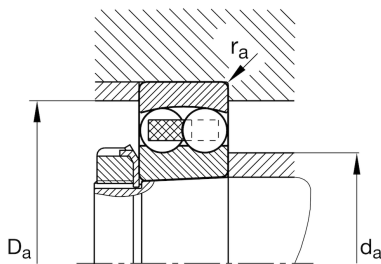
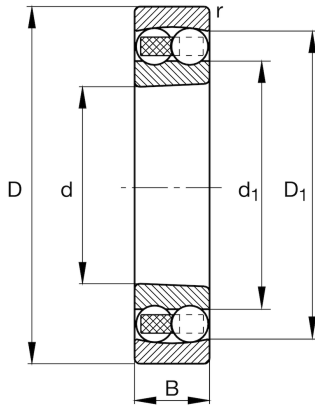
FAG

2213-K-TVH-C3

Self-aligning ball bearing

Schaeffler ID:
0389046670030Self-aligning ball bearing 22..-K-TVH,
tapered bore taper 1:12, plastic cage

Technical information

**Dimensions**

D_1	106,9 mm	Shoulder diameter outer ring
d_1	82,4 mm	Shoulder diameter inner ring
	1,32 kg	Weight

Main Dimensions & Performance Data

d	65 mm	Bore diameter
D	120 mm	Outside diameter
B	31 mm	Width
r_{\min}	1,5 mm	Minimum chamfer dimension
C_r	58.000 N	Basic dynamic load rating, radial
C_{0r}	19.200 N	Basic static load rating, radial
C_{ur}	1.220 N	Fatigue load limit, radial
n_G	5.600 1/min	Limiting speed
n_{gr}	6.200 1/min	Reference speed

Mounting dimensions

$d_{a\min}$	74 mm	Minimum diameter shaft shoulder
$d_{a\max}$	79 mm	Maximum diameter shaft shoulder
$D_{a\max}$	111 mm	Maximum diameter of housing shoulder
$d_{b\min}$	70 mm	Minimum cavity diameter of the sleeve
$B_{a\min}$	8 mm	Minimum cavity width of the sleeve
$r_{a\max}$	1,5 mm	Maximum fillet radius

Calculation factors

e	0,23	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	2,78	Dynamic axial load factor
Y_2	4,3	Dynamic axial load factor
Y_0	2,91	Static axial load factor

Additional information

H313

Adapter sleeve

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.