

FAG

★ 22215-E1-XL-K

Spherical roller bearing


Schaeffler ID:
0167039010000

★ Preferred product

X-life

Spherical roller bearings 222...-E1-K, main dimensions to DIN 635-2, with tapered bore, taper 1:12

Technical information

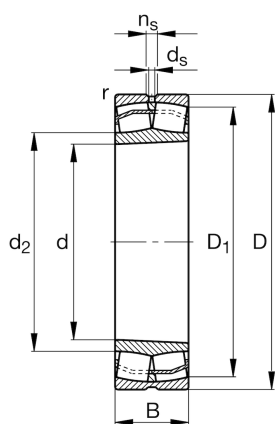

Main Dimensions & Performance Data


d	75 mm	Bore diameter
D	130 mm	Outside diameter
B	31 mm	Width
C_r	216.000 N	Basic dynamic load rating, radial
C_{0r}	237.000 N	Basic static load rating, radial
C_{ur}	30.500 N	Fatigue load limit, radial
n_G	6.500 1/min	Limiting speed
n_{gr}	3.700 1/min	Reference speed
	1,676 kg	Weight

Additional information

r_{min}	1,5 mm	Minimum chamfer dimension
	H315	Adapter sleeve
D_1	117,7 mm	Bore diameter outer ring
	AH315G	Withdrawal sleeve
d_2	89,8 mm	Raceway diameter of the inner ring
d_s	3,2 mm	Diameter lubrication hole
n_s	6,5 mm	Width of lubricating groove

Mounting dimensions

$d_{a min}$	84 mm	Minimum diameter shaft shoulder
$d_{a max}$	89 mm	Maximum diameter of shaft shoulder
$D_{a max}$	121 mm	Maximum diameter of housing shoulder
$r_{a max}$	1,5 mm	Maximum recess radius
$d_{b min}$	80 mm	Minimum cavity diameter of the sleeve
$B_{a min}$	12 mm	Minimum cavity width of the sleeve

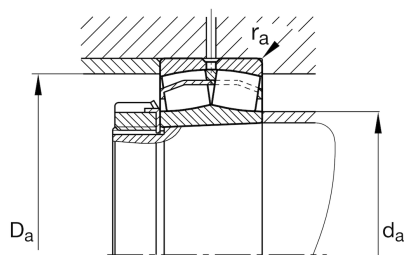

Calculation factors

e	0,22	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y ₁	3,1	Dynamic axial load factor
Y ₂	4,62	Dynamic axial load factor
Y ₀	3,03	Static axial load factor

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	200 °C	Operating temperature max.