




Technical data

32218U

Single row tapered roller bearings

Tapered roller bearing, pressed steel cage

VISUAL (S)

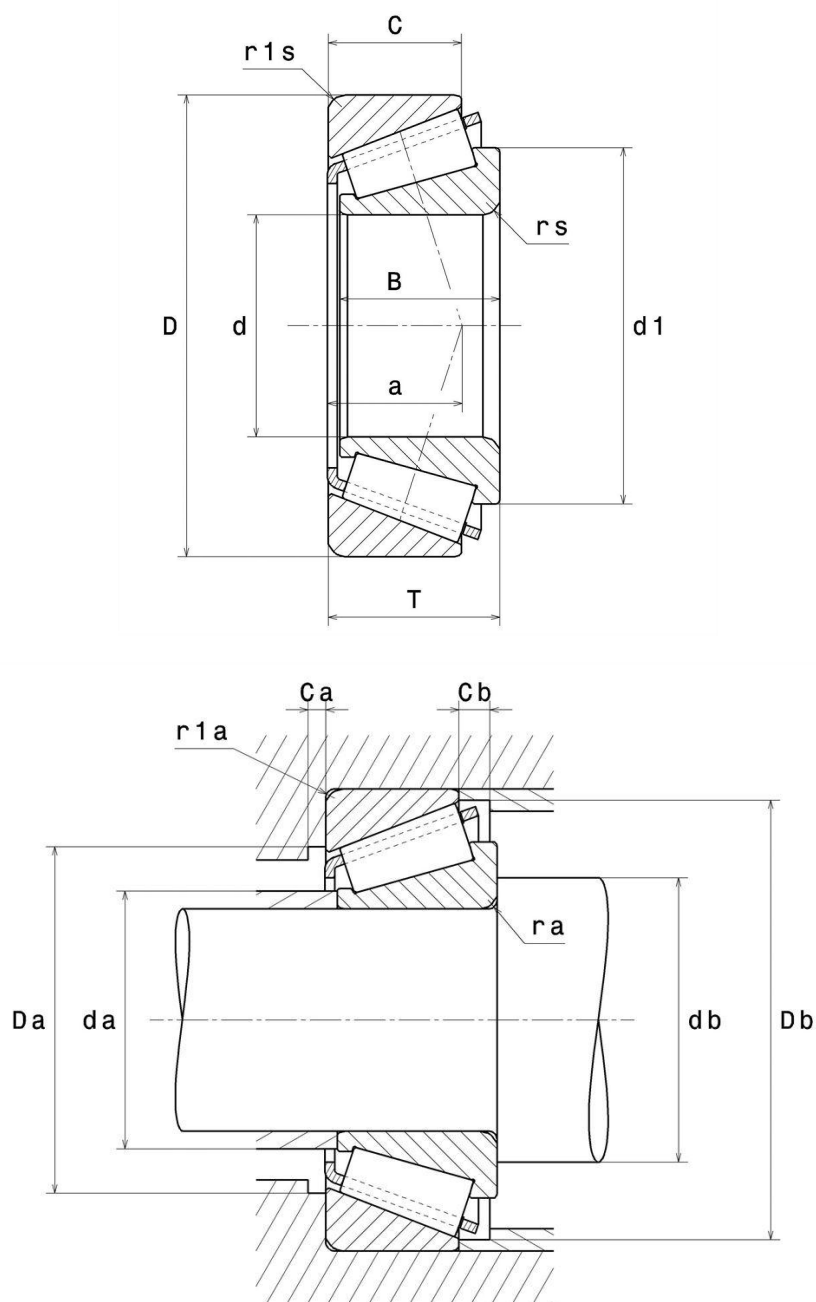

32218U

Single row tapered roller bearings

PRODUCT DIMENSIONS

Internal diameter d	90 mm
External diameter D	160 mm
Bearing/Inner ring width(B)	40 mm
Outer ring width (C)	34 mm
Total width (T)	42,5 mm
External diameter inner ring d1	122,5 mm
Charge load application point a	36 mm
Min fillet radius rs	2,5 mm
Min fillet radius r1s	2 mm
Coef e	0.42
Upper axial load coef (Y2)	1.43
Static axial load coef (Y0)	0.79
Mass	3,49 kg
ISO 355 reference	T3FC090
Brand	NTN

PRODUCT PERFORMANCE

Dynamic load, C	291 kN
Rating life coefficient, A2	1.0
Static load, C0	360 kN
Fatigue limit load, Cu	41 kN
Nlim (oil)	3000 tr/min
Nlim (grease)	2200 tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.429 Hz
Characteristic rolling element frequency, BSF	6.629 Hz
Characteristic outer ring frequency, BPF0	8.577 Hz
Characteristic inner ring frequency, BPFI	11.423 Hz

ABUTMENT

Max shoulder diameter IR da max	102 mm
Min IR shoulder diameter (db min)	102 mm

32218U

Single row tapered roller bearings

ABUTMENT

Min shoulder diameter OR Da min	138 mm
Max shoulder diameter OR Da max	150 mm
Min OR shoulder diameter Db min	152 mm
Min clearance Ca	5 mm
Min clearance Cb	8,5 mm
Max fillet radius ra max	2 mm
Maxi fillet radius r1a	2 mm

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

$$P = X.Fr + Y.Fa$$

Fa / Fr ≤ e		Fa / Fr > e	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$$Po = Xo.Fr + Yo.Fa$$

Xo	Yo
0.5	Yo

If $Po < Fr$, then use $Po = Fr$

The values for e, Y2 and Yo are shown in the above table