


## Technical data

### HK2526

Drawn cup needle roller bearings, opened end

#### VISUAL (S)

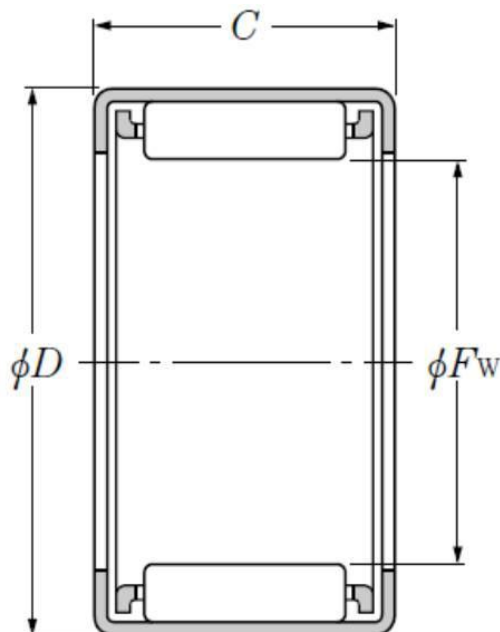

#### PRODUCT DIMENSIONS

<b>Fw</b>	25 mm
<b>D</b>	32 mm
<b>C</b>	26 mm
<b>Lubrication hole on outer ring</b>	No
<b>Inner ring reference</b>	IR20X25X26.5
<b>Mass</b>	0,045 kg
<b>Brand</b>	NTN

#### PRODUCT PERFORMANCE

<b>Cr</b>	26,4 kN
<b>C0r</b>	46 kN
<b>Nlim (grease)</b>	6500 tr/min
<b>Nlim (oil)</b>	9500 tr/min

# HK2526

Drawn cup needle roller bearings, opened end

## PRODUCT PERFORMANCE

<b>Min operating temperature, Tmin</b>	-20 °C
<b>Max operating temperature, Tmax</b>	120 °C
<b>Characteristic cage frequency, FTF</b>	0.455 Hz
<b>Characteristic rolling element frequency, BSF</b>	10.909 Hz
<b>Characteristic outer ring frequency, BPF0</b>	10.0 Hz
<b>Characteristic inner ring frequency, BRFI</b>	12.0 Hz