




Technical information

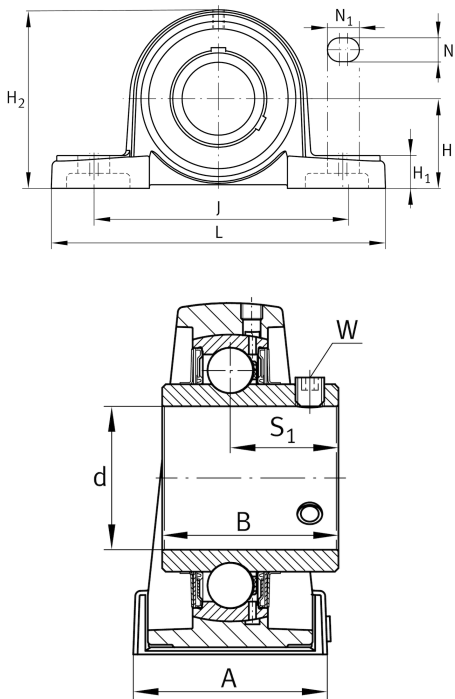

| Dimensions | | |
|----------------|----------|---------------------------------------|
| H | 47,6 mm | Distance shaft axis |
| A | 48 mm | Width (base) |
| H ₁ | 18 mm | Heigth (base) |
| B | 42,9 mm | Width |
| S ₁ | 25,4 mm | Distance of raceway to locking collar |
| Q | M6 | Connection thread lubrication |
| | 1,648 kg | Weight |

| Main Dimensions & Performance Data | | |
|------------------------------------|--------|---------------|
| d | 35 mm | Bore diameter |
| L | 167 mm | Length total |
| H ₂ | 93 mm | Height |

| Mounting dimensions | | |
|---------------------|--------|----------------------|
| J | 127 mm | Distance fixing bore |
| N | 17 mm | Width (slot) |
| N ₁ | 21 mm | Length (slot) |

| Additional information | | |
|------------------------|---------------------|--|
| P207 | Housing | |
| UC207 | Bearing designation | |