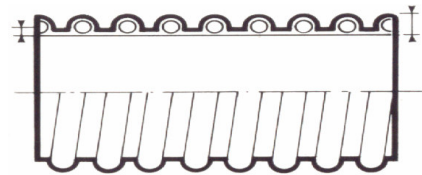


**EOLO**


**PRIMJENA**  
**MATERIJAL CIJEVI:**  
**OJAČANJE:**  
**TEMPERATURA:**

usis i prolaz piljevine, otpiljaka, ventilacija  
 plastificirani PVC sive boje  
 spirala od tvrdog PVC-a sive boje  
 -10 +60 °C

Promjer (mm)	Podtlak (bar)	Težina (kg/m)	Pol. sav. (mm)	Kolut (m)
13	0.60	0.090	13	30
19	0.40	0.120	25	50
20	0.40	0.125	26	50
25	0.55	0.200	25	50
30	0.50	0.215	30	50
32	0.50	0.230	32	50
35	0.50	0.240	35	50
38	0.50	0.265	38	50
40	0.40	0.280	40	50
45	0.40	0.360	45	50
50	0.40	0.450	50	50
55	0.30	0.550	65	50
60	0.40	0.540	60	50
63	0.40	0.565	63	50
70	0.40	0.640	70	50
75	0.40	0.690	75	50
80	0.40	0.780	80	30
90	0.40	0.830	90	30
102	0.40	0.980	100	30
110	0.40	1.100	110	30
120	0.40	1.200	120	30
127	0.40	1.250	125	30
130	0.40	1.300	130	30
140	0.40	1.500	140	30
152	0.40	1.700	150	20
160	0.40	1.900	160	20
170	0.15	2.350	210	20
180	0.40	2.200	180	20
200	0.40	2.400	200	20
250	0.40	3.600	250	10
300	0.40	4.500	300	10