



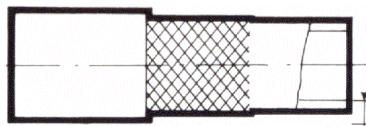

CRISTALCORD

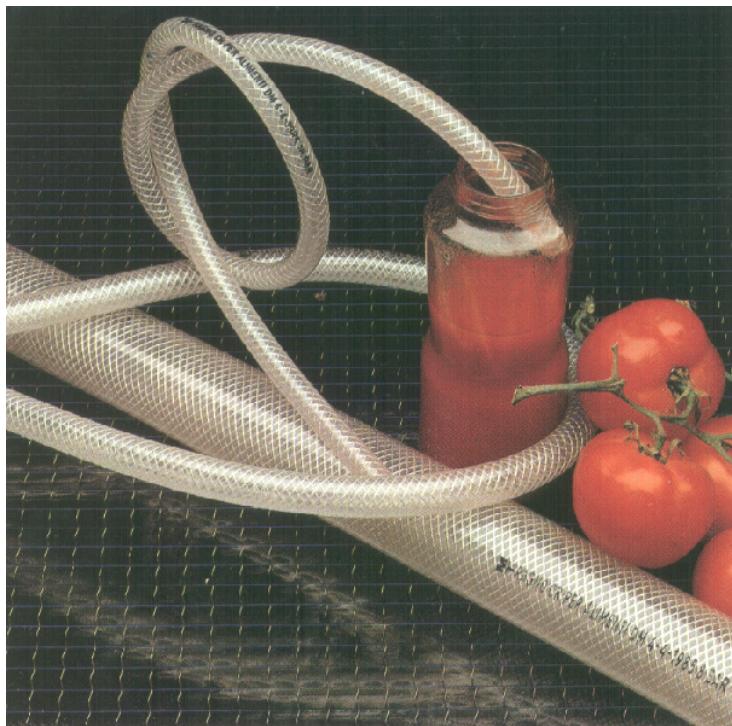

PRIMJENA

tlak prehrambenih tekućina (pitka voda, voćni sokovi, ocat)

MATERIJAL CIJEVI:

prozirni atoksični plastificirani PVC

OJAČANJE:

poliesterska mreža

TEMPERATURA:

-10 +60 °C

Promjer (mm)	Radni tlak (bar)	Rasprs. tlak (bar)	Težina (kg/m)	Kolut (m)	Montaža → Obujmice	
					Poc. čelik	Inox
4 x 10	18	54	0.080	100	9 8 - 16 Fe/Zn	9 8 - 12 Inox
5 x 11	18	54	0.090	100	9 8 - 16 Fe/Zn	9 8 - 12 Inox
6 x 11	20	60	0.086	200	9 8 - 16 Fe/Zn	9 8 - 12 Inox
8 x 13	20	60	0.107	200	9 8 - 16 Fe/Zn	9 10 - 16 Inox
9 x 15	15	45	0.140	100	9 8 - 16 Fe/Zn	9 10 - 16 Inox
10 x 15	15	45	0.130	100	9 8 - 16 Fe/Zn	9 10 - 16 Inox
12 x 17	15	45	0.145	100	12 12 - 20 Fe/Zn	12 16 - 25 Inox
13 x 18	12	36	0.152	100	12 12 - 20 Fe/Zn	12 16 - 25 Inox
15 x 21	10	30	0.212	100	12 16 - 25 Fe/Zn	12 16 - 25 Inox
16 x 22	10	30	0.223	100	12 16 - 25 Fe/Zn	12 16 - 25 Inox
19 x 25	10	30	0.270	50	12 16 - 25 Fe/Zn	12 20 - 32 Inox
22 x 29	8	24	0.345	50	12 20 - 32 Fe/Zn	12 20 - 32 Inox
25 x 32	10	30	0.400	50	12 25 - 40 Fe/Zn	12 25 - 40 Inox
30 x 38	8	24	0.550	50	12 25 - 40 Fe/Zn	12 25 - 40 Inox
32 x 42	8	24	0.730	25	12 35 - 50 Fe/Zn	12 32 - 50 Inox
35 x 45	7	21	0.780	25	12 35 - 50 Fe/Zn	12 32 - 50 Inox
38 x 48	7	21	0.850	25	12 35 - 50 Fe/Zn	12 40 - 60 Inox
40 x 50	7	21	0.900	25	12 40 - 60 Fe/Zn	12 40 - 60 Inox
45 x 55	7	21	1.000	25	12 40 - 60 Fe/Zn	12 40 - 60 Inox
50 x 60	7	21	1.100	25	12 50 - 70 Fe/Zn	12 50 - 70 Inox