


AQUAGEN

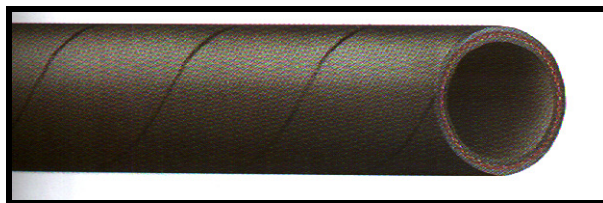

PRIMJENA: tlak vode, inertnih fluida i zraka
UNUTARNJI SLOJ: glatka ekstrudirana SBR guma crne boje
OJAČANJE: tekstilna mreža
VANJSKI SLOJ: glatka ekstrudirana SBR guma crne boje
TEMPERATURA: -20 +80 °C

Promjer (mm)	Radni tlak (bar)	Rasprs. tlak (bar)	Težina (kg/m)	Pol. sav. (mm)	Kolut (m)	Montaža
						Čahure
5 x 11	10	30	0.09	40	100	12 – 14 Al
6 x 11	10	30	0.15	45	100	12 – 14 Al
8 x 15	10	30	0.18	50	100	16 – 18 Al
10 x 17	10	30	0.21	60	100	18 – 20 Al
13 x 19	10	30	0.21	80	100	20 – 22 Al
15 x 21	10	30	0.25	90	100	22 – 24 Al
16 x 23	10	30	0.30	100	50	24 – 26 Al
19 x 26	10	30	0.35	110	50	28 – 30 Al
22 x 30	10	30	0.46	140	50	30 – 32 Al
25 x 33	10	30	0.52	150	50	34 – 36 Al
30 x 42	10	30	0.84	240	50	43 – 45 Inox
32 x 44	10	30	0.96	250	50	47 – 50 Al