



FAG



## NU214-E-XL-M1

Cylindrical roller bearing

Schaeffler ID:  
0167378900000Cylindrical roller bearing NU..-E-XL-M1,  
with cage, single row, non-locating bearing,  
2 ribs on outer ring, 0 ribs on inner ring  
(smooth), type NU

X-life

## Technical information

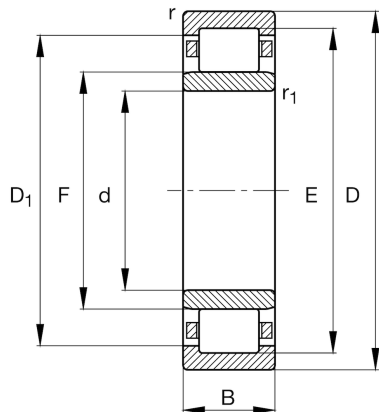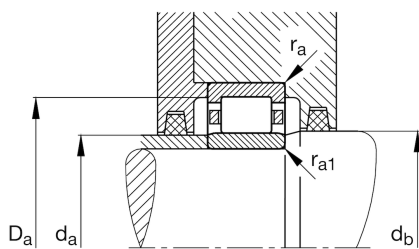

## Dimensions

$r_{\min}$	1,5 mm	Minimum chamfer dimension
$r_{1\min}$	1,5 mm	Minimum chamfer dimension
s	1,2 mm	Axial displacement
E	113,5 mm	Raceway diameter outer ring
F	83,5 mm	Raceway diameter inner ring
$D_{1\min}$	109,36 mm	Minimum rib diameter outer ring
	1,267 kg	Weight

## Main Dimensions &amp; Performance Data

d	70 mm	Bore diameter
D	125 mm	Outside diameter
B	24 mm	Width
$C_r$	141.000 N	Basic dynamic load rating, radial
$C_{0r}$	138.000 N	Basic static load rating, radial
$C_{ur}$	19.500 N	Fatigue load limit, radial
$n_G$	10.100 1/min	Limiting speed
$n_{gr}$	4.650 1/min	Reference speed

## Mounting dimensions

$d_{a\min}$	79 mm	Minimum diameter shaft shoulder
$d_{a\max}$	82 mm	Maximum diameter of shaft shoulder
$d_{b\min}$	86 mm	Minimum shaft shoulder
$D_{a\max}$	116 mm	Maximum diameter of housing shoulder
$r_{a\max}$	1,5 mm	Maximum recess radius
$r_{a1\max}$	1,5 mm	Maximum recess radius

## Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	150 °C	Operating temperature max.

