




ROTARY DRILL

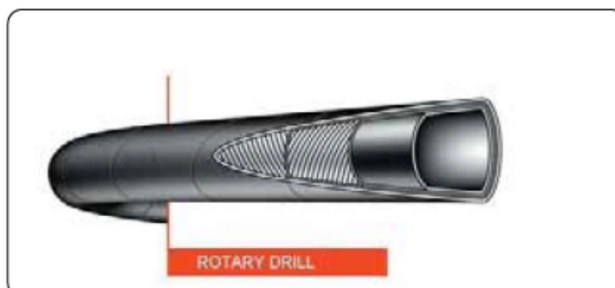

| Descrizione Description | P Es. Bar Working Press. bar | P Scoppio Bar Bursting Press. bar | Peso nom. kg/m Weight kg/m | UM |  |  |
|----------------------------------|------------------------------------|---|----------------------------------|-----|---|---|
| TUBO G ROTARY DRILL/20 13X23 1/2 | 20 | 60 | 0,38 | mt. | 120 | 40 |
| TUBO G ROTARY DRILL/20 16X26 5/8 | 20 | 60 | 0,36 | mt. | 120 | 40 |
| TUBO G ROTARY DRILL/20 19X30 3/4 | 20 | 60 | 0,54 | mt. | 120 | 40/60 |
| TUBO G ROTARY DRILL/20 25X37 1" | 20 | 60 | 0,78 | mt. | 120 | 40/60 |
| TUBO G ROTARY DRILL/35 19X32 3/4 | 25 | 75 | 0,6 | mt. | 120 | 40 |
| TUBO G ROTARY DRILL/35 25X39 1" | 25 | 75 | 0,85 | mt. | 120 | 40/60 |

I VALORI RIPORTATI SONO RIFERITI AD UNA TEMPERATURA DI +18°C | THE DATA ARE REFERRED TO A TEMPERATURE OF +18°C

IT|

Tubo per mandata di aria compressa, resistente alle tracce di olio nebulizzato. Sottostrato nero liscio in gomma sintetica, inserzioni tessili ad alta tenacità, copertura in gomma sintetica resistente alle intemperie, all'ozono ed all'abrasione. Superficie esterna nera liscia ad impressione di tela. Temperatura di esercizio -30+70°C. Altre dimensioni lunghezze e colori sono realizzabili su richiesta.

Note: Norme: ISO 1307

EN|

For compressed air delivery, oil mist resistant. Black, smooth synthetic rubber inner layer. High tensile synthetic plies. Black, synthetic rubber outer layer weather, ozone and abrasion resistant, smooth with textile finish. Temperature range: -30°C to +70°C. Other dimensions, lengths, colors and pressures available on request.

Note: According to ISO 1307