




## GIR6-DO

### Rod end

Schaeffler ID:  
0066356600000

Rod end with internal thread, right hand thread, requiring maintenance, sliding contact surface: steel/steel, DIN ISO 12240-4, dimension series E, type F, open design

## Technical information

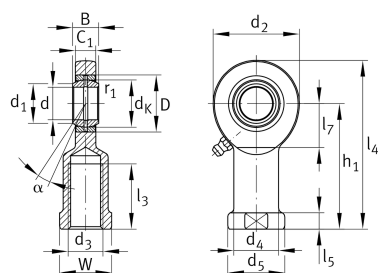

### Main Dimensions & Performance Data

d	6 mm	Bore diameter bearing
D	14 mm	Outside diameter bearing
B	6 mm	Width inner ring
C <sub>r</sub>	3.400 N	Basic dynamic load rating, radial
C <sub>0r</sub>	10.300 N	Basic static load rating, radial
G <sub>r</sub>	0,023 - 0,068 mm	Radial Clearance
	23 g	Weight

### Dimensions

d <sub>K</sub>	10 mm	Ball diameter
d <sub>1</sub>	8 mm	Outer flange diameter inner ring
d <sub>2</sub>	21 mm	Outer eye diameter
d <sub>3</sub>	M6	Thread size
d <sub>4</sub>	10 mm	Shank diameter
h <sub>1</sub>	30 mm	Shank Length Internal thread head
α	13 °	Tilt angle
l <sub>3</sub>	11 mm	Thread length Internal thread
l <sub>4</sub>	40,5 mm	Total length internal thread head
l <sub>5</sub>	5 mm	length rod end shank
l <sub>7</sub>	12 mm	Distance drilling with/shaft start
d <sub>5</sub>	13 mm	Shank diameter, large
C <sub>1</sub>	4,4 mm	Width of the rod end
r <sub>1smin</sub>	0,3 mm	Edge Spacing
W	11 mm	Width Across Flat
d <sub>OT</sub>	0 mm	Bore diameter bearing, upper tolerance
d <sub>UT</sub>	-0,008 mm	Bore diameter bearing, lower tolerance
B <sub>OT</sub>	0 mm	Width inner ring, upper tolerance
B <sub>UT</sub>	-0,12 mm	Width inner ring, lower tolerance

**Temperature range**

T <sub>min</sub>	-60 °C	Operating temperature min.
T <sub>max</sub>	200 °C	Operating temperature max.