



Technical data

MUCPPL205


Bearing units

Thermoplastic housing, stainless steel insert ball bearing with socket set screws, seal with slinger, food grease

KIT CONTENT

MUC205FD, PPL205

VISUAL (S)

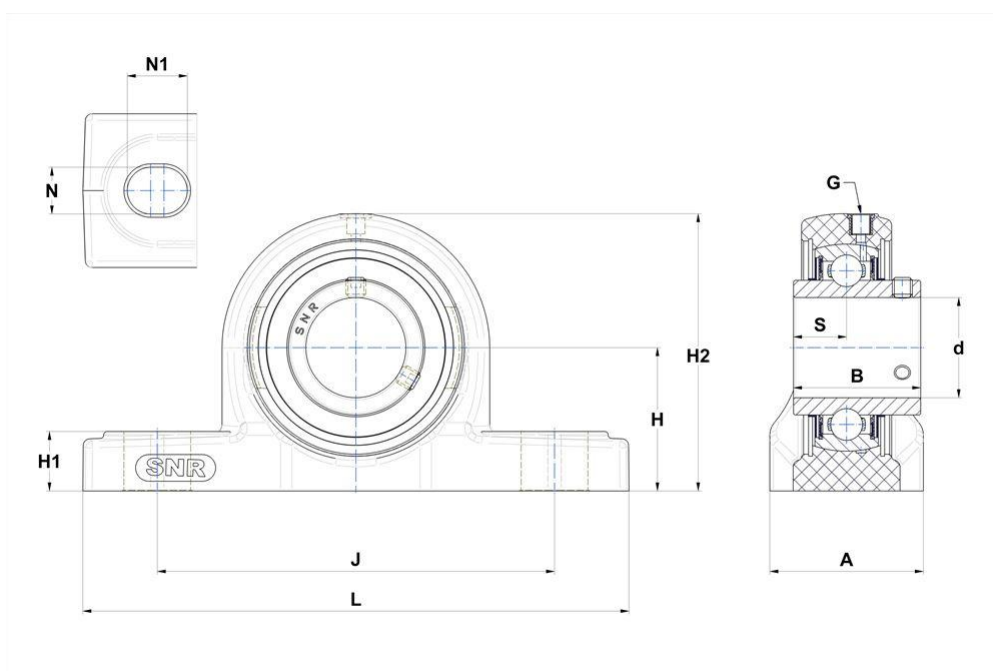

PRODUCT DEFINITION

Brand	SNR
A - Housing width	38 mm
A1 - Housing top width	24,5 mm
B - Width of Inner Ring	34,1 mm
d - Shaft diameter	25 mm

PRODUCT DEFINITION

G - Grease fitting	1/4-28 UNF
H - Distance mounting base to centerline spheric. seating diam.	36,5 mm
H1 - Housing foot height	14,5 mm
H2 - Housing height	71 mm
J - Mounting holes distance	105 mm
L - Housing length	140 mm
N - Mounting hole dimension	11 mm
N1 - Mounting hole length	14 mm
S - Distance front side/bearing centre	14,3 mm

PRODUCT PERFORMANCE

C - Dynamic load rating	11,9 kN
C0 - Static load rating	6,3 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	0,33 kg
Recommended tightening torque for set screw	3.9 N-m