



FAG

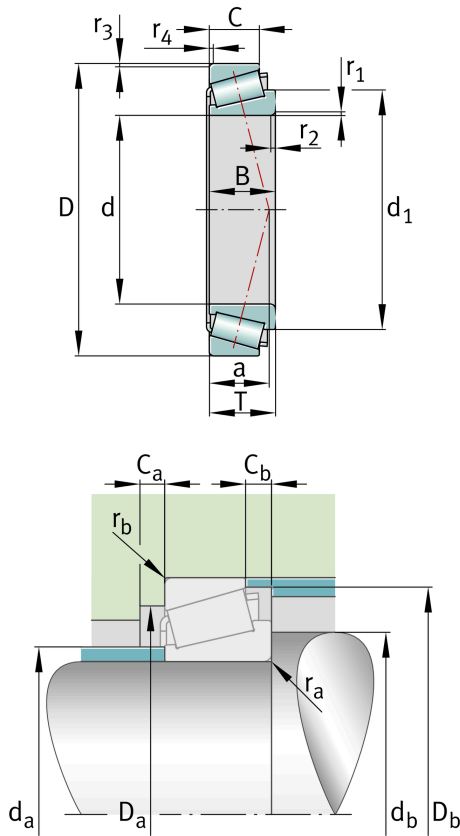
33109-H

Tapered roller bearing

Schaeffler ID:
0956396910000

Tapered roller bearings 331, main dimensions to DIN ISO 355 / DIN 720, separable, adjusted or in pairs

Technical information

**Main Dimensions & Performance Data**

d	45 mm	Bore diameter
D	80 mm	Outside diameter
B	26 mm	Width, inner ring
C	20,5 mm	Width, outer ring
T	26 mm	Width, total
C_r	79.800 N	Basic dynamic load rating, radial
C_{0r}	115.000 N	Basic static load rating, radial
C_{ur}	14.700 N	Fatigue load limit, radial
n_G	7.040 1/min	Limiting speed
n_{gr}	4.950 1/min	Thermal speed rating
	0,55 kg	Weight

Mounting dimensions

$d_{a \max}$	52 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	52 mm	Minimum diameter of shaft shoulder
$D_{a \max}$	73 mm	Maximum diameter of housing shoulder
$C_{a \min}$	4 mm	Minimum axial space
$C_{b \min}$	5,5 mm	Minimum axial space
$r_{a \max}$	1,5 mm	Maximum fillet radius of shaft

Dimensions

$r_{1,2 \min}$	1,5 mm	Minimum chamfer dimension of inner ring back face
$r_{3,4 \min}$	1,5 mm	Minimum chamfer dimension of outer ring back face
a	19 mm	Distance between the apexes of the pressure cones
d_1	65,4 mm	Guidance rib diameter of inner ring

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.

Calculation factors

e	0,38	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y	1,57	Dynamic axial load factor
Y ₀	0,86	Static axial load factor

Additional information

T3CE045	Comparative designation to ISO 10317 and ISO 355
---------	--