

FAG

## ★ 22207-E1-XL-K

Spherical roller bearing


Schaeffler ID:  
0190003320000

★ Preferred product

X-life

Spherical roller bearings 222...-E1-K, main dimensions to DIN 635-2, with tapered bore, taper 1:12

## Technical information

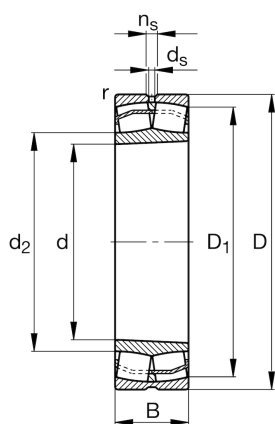

## Main Dimensions &amp; Performance Data


d	35 mm	Bore diameter
D	72 mm	Outside diameter
B	23 mm	Width
C <sub>r</sub>	89.000 N	Basic dynamic load rating, radial
C <sub>0r</sub>	81.000 N	Basic static load rating, radial
C <sub>ur</sub>	9.700 N	Fatigue load limit, radial
n <sub>G</sub>	10.700 1/min	Limiting speed
n <sub>gr</sub>	7.000 1/min	Reference speed
	0,414 kg	Weight

## Additional information

r <sub>min</sub>	1,1 mm	Minimum chamfer dimension
	H307	Adapter sleeve
D <sub>1</sub>	62,5 mm	Bore diameter outer ring
d <sub>2</sub>	43,9 mm	Raceway diameter of the inner ring
d <sub>s</sub>	3,2 mm	Diameter lubrication hole
n <sub>s</sub>	4,8 mm	Width of lubricating groove

## Mounting dimensions

d <sub>a min</sub>	42 mm	Minimum diameter shaft shoulder
d <sub>a max</sub>	43 mm	Maximum diameter of shaft shoulder
D <sub>a max</sub>	65 mm	Maximum diameter of housing shoulder
r <sub>a max</sub>	1 mm	Maximum recess radius
d <sub>b min</sub>	39 mm	Minimum cavity diameter of the sleeve
B <sub>a min</sub>	5 mm	Minimum cavity width of the sleeve

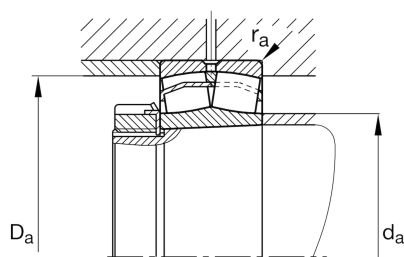

**Calculation factors**

e	0,31	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y <sub>1</sub>	2,21	Dynamic axial load factor
Y <sub>2</sub>	3,29	Dynamic axial load factor
Y <sub>0</sub>	2,16	Static axial load factor

**Temperature range**

T <sub>min</sub>	-30 °C	Operating temperature min.
T <sub>max</sub>	200 °C	Operating temperature max.