

FAG


★ 33210

Tapered roller bearing

Schaeffler ID:  
0167140750000Tapered roller bearings 332, main  
dimensions to DIN ISO 355 / DIN 720,  
separable, adjusted or in pairs

★ Preferred product

## Technical information

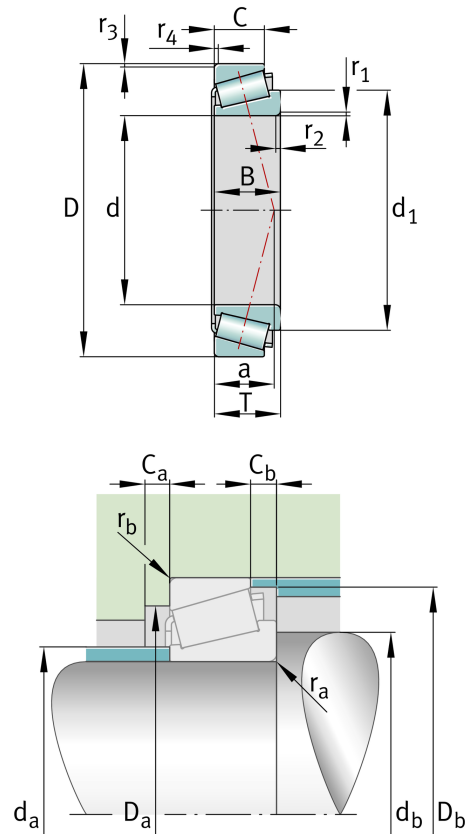

## Main Dimensions &amp; Performance Data

d	50 mm	Bore diameter
D	90 mm	Outside diameter
B	32 mm	Width, inner ring
C	24,5 mm	Width, outer ring
T	32 mm	Width, total
$C_r$	115.000 N	Basic dynamic load rating, radial
$C_{0r}$	163.000 N	Basic static load rating, radial
$C_{ur}$	20.800 N	Fatigue load limit, radial
$n_G$	7.700 1/min	Limiting speed
$n_{gr}$	4.700 1/min	Thermal speed rating
	0,867 kg	Weight

## Dimensions

$r_{1,2 \text{ min}}$	1,5 mm	Minimum chamfer dimension of inner ring back face
$r_{3,4 \text{ min}}$	1,5 mm	Minimum chamfer dimension of outer ring back face
a	24 mm	Distance between the apexes of the pressure cones
$d_1$	71,8 mm	Guidance rib diameter of inner ring

## Mounting dimensions

$d_{a \text{ max}}$	57 mm	Maximum diameter of shaft shoulder
$d_{b \text{ min}}$	57 mm	Minimum diameter of shaft shoulder
$D_{a \text{ min}}$	77 mm	Minimum diameter of housing shoulder
$D_{a \text{ max}}$	83 mm	Maximum diameter of housing shoulder
$D_{b \text{ min}}$	87 mm	Minimum diameter of housing shoulder
$C_{a \text{ min}}$	5 mm	Minimum axial space
$C_{b \text{ min}}$	7,5 mm	Minimum axial space
$r_{a \text{ max}}$	1,5 mm	Maximum fillet radius of shaft
$r_{b \text{ max}}$	1,5 mm	Maximum fillet radius of housing

**Temperature range**

e	0,41	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
T <sub>min</sub>	-30 °C	Operating temperature min.
Y	1,45	Dynamic axial load factor
T <sub>max</sub>	120 °C	Operating temperature max.
Y <sub>0</sub>	0,8	Static axial load factor

**Additional information**

T3DE050	Comparative designation to ISO 10317 and ISO 355
---------	--