



Technical data

UCFL.208


Bearing units

grey cast housing, radial insert ball bearing with socket set screws, seal with slinger, for low-temp. applications

KIT CONTENT

UC208G2, FL208

VISUAL (S)

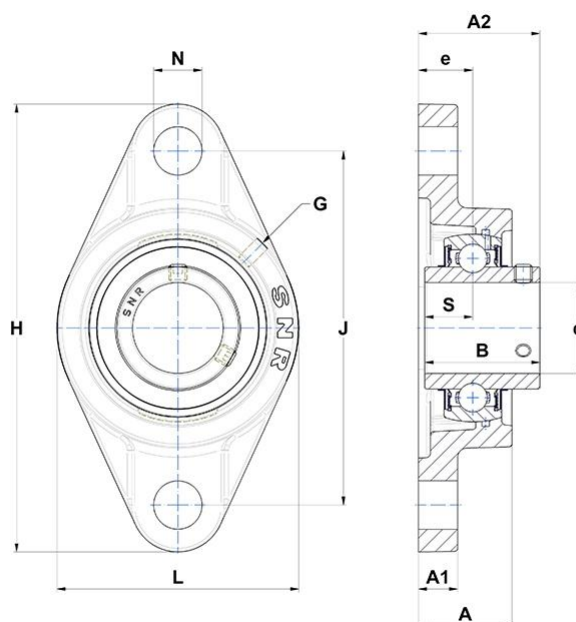

OTHER FEATURES

Mass	1,48 kg
Recommended tightening torque for set screw [Nm]	11.5 N-m

PRODUCT DIMENSIONS

Housing height (A)	36 mm
Housing foot height / flange height (A1)	14 mm
Total height (Housing + Insert) from mounting surface	51,2 mm
Width of IR (B)	49,2 mm

PRODUCT DIMENSIONS

Shaft dia (d)	40 mm
Distance mounting surface - bearing center (e)	21 mm
Grease fitting (G)	M6x1
Housing length, width or diameter (H)	175 mm
Housing width / dia (L)	100 mm
Mounting hole dimension (N)	16 mm
Dist. cent. of raceway to face IR on side opp. lock. device	19 mm
Brand	SNR

PRODUCT PERFORMANCE

Dynamic load rating (C)	29,6 kN
Static load rating (C0)	18,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C