

FAG

★ NJ2308-E-XL-TVP2

Cylindrical roller bearing




Schaeffler ID:
0167353820000

★ Preferred product

Cylindrical roller bearing NJ..-E-XL-TVP2,
with cage, single row, semi-locating
bearing, 2 ribs on outer ring, 1 rib on inner
ring, type NJ

X-life

Technical information

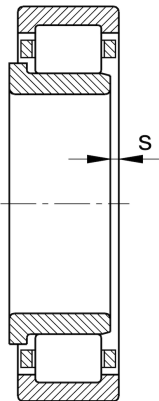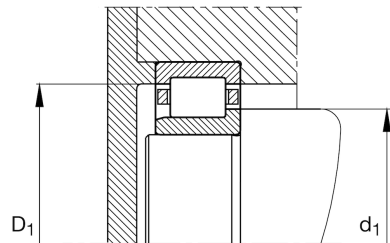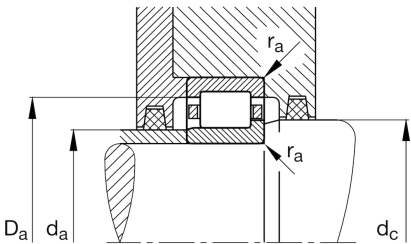

Main Dimensions & Performance Data

d	40 mm	Bore diameter
D	90 mm	Outside diameter
B	33 mm	Width
C _r	132.000 N	Basic dynamic load rating, radial
C _{0r}	119.000 N	Basic static load rating, radial
C _{ur}	21.900 N	Fatigue load limit, radial
n _G	9.500 1/min	Limiting speed
n _{gr}	5.800 1/min	Reference speed
	0,951 kg	Weight

Dimensions

r _{min}	1,5 mm	Minimum chamfer dimension
r _{1 min}	1,5 mm	Minimum chamfer dimension
s	2,7 mm	Axial displacement
E	80 mm	Raceway diameter outer ring
F	52 mm	Raceway diameter inner ring
D _{1 min}	75,9 mm	Minimum rib diameter outer ring
d ₁	57,6 mm	Maximum rib diameter inner ring

Mounting dimensions

d _{a min}	49 mm	Minimum diameter shaft shoulder
d _{a max}	51 mm	Maximum diameter of shaft shoulder
D _{a max}	81 mm	Maximum diameter of housing shoulder
d _{c min}	60 mm	Minimum shaft shoulder
r _{a max}	1,5 mm	Maximum recess radius

Temperature range

	HJ2308-E	L-washer
T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

