

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer		: ASTRAPROM				
Product line		: W22 IE3 Three-Phase		Product code :		12868215
Frame	: 132M/L	Locked rotor time	: 14s (cold) 8s (hot)			
Output	: 9.2 kW (12.5 HP)	Temperature rise	: 80 K			
Frequency	: 50 Hz	Duty cycle	: S1			
Rated voltage	: 400/690 V	Ambient temperature	: -20°C to +40°C			
Poles	: 4	Altitude	: 1000 m.a.s.l.			
Rated current	: 17.8/10.3 A	Protection degree	: IP55			
LRC	: 8.6	Cooling method	: IC411 - TEFC			
Rated speed	: 1465 rpm	Mounting	: B5T			
Rated torque	: 60.0 Nm	Rotation ¹	: Both (CW and CCW)			
Insulation class	: F	Noise level ²	: 56.0 dB(A)			
Service factor	: 1.00	Starting method	: Direct On Line			
Moment of inertia (J)	: 0.0698 kgm ²	Approx. weight ³	: 90.4 kg			
Design	: N					
Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	89.0	90.5	91.0	Max. traction : 3603 N	
Power Factor	0.00	0.64	0.76	0.82	Max. compression : 4490 N	
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
9.8	8.8	8.5	4.6	3.5	2.3	1.7
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6308 ZZ		6207 ZZ		
Sealing	:	Oil Seal		Lip Seal		
Lubrication interval	:	-		-		
Lubricant amount	:	-		-		
Lubricant type	:	00088				
Notes						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in IEC 60034-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	27/03/2026				1 / 2	

DATA SHEET




Three Phase Induction Motor - Squirrel Cage

Customer : ASTRAPROM

Thermal protection


ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermistor - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	27/03/2026		2 / 2	

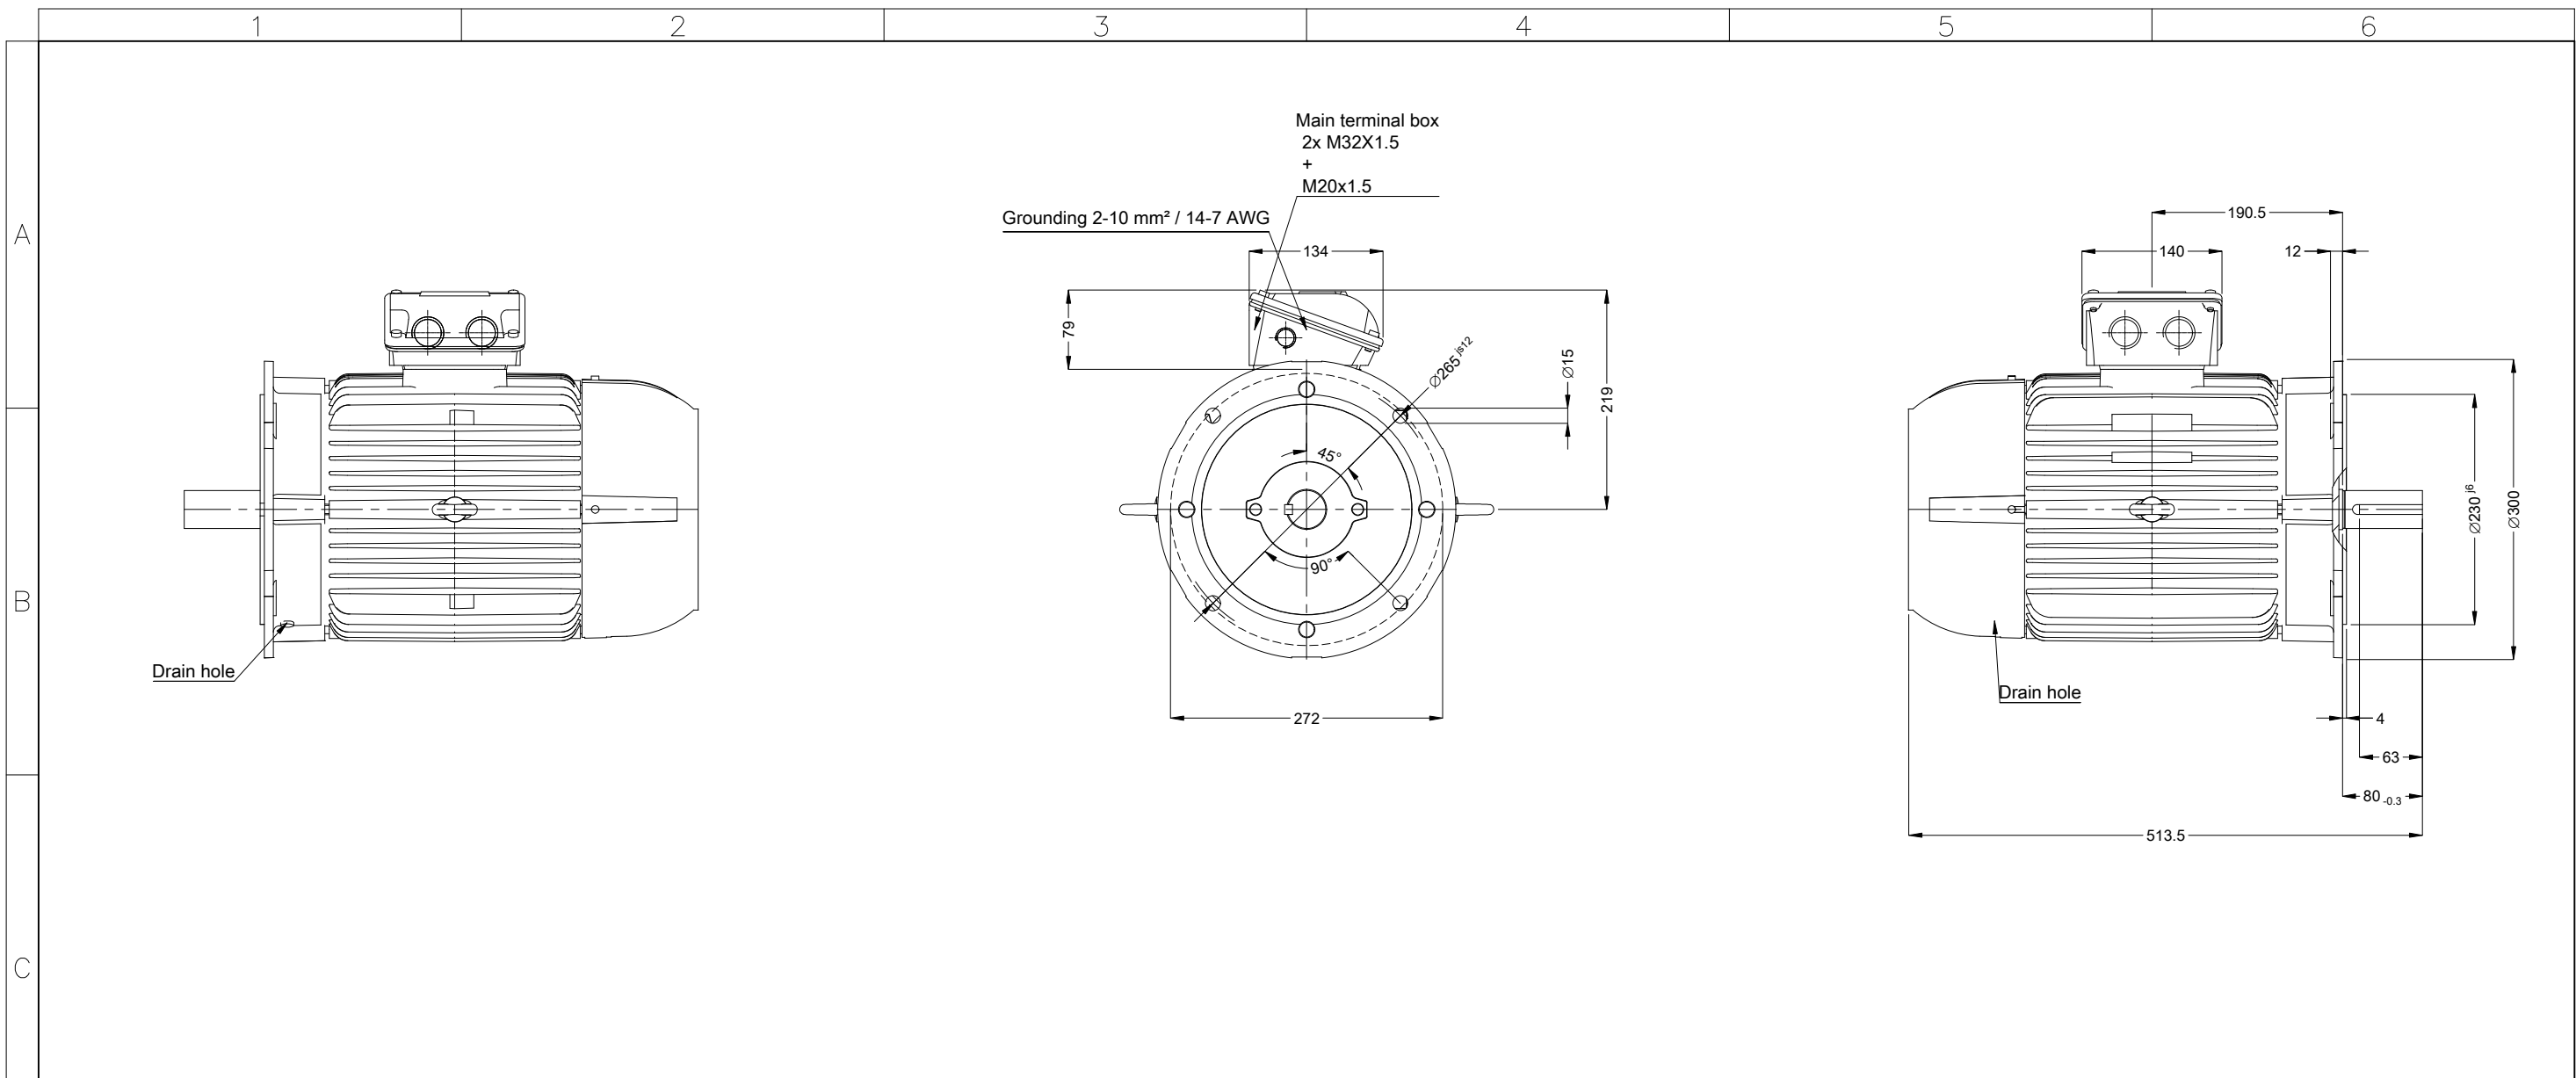

				9.2 kW 04 Poles 50 Hz		A				
				Scale		2 : 13				
				HYBRISUSER		00				
		ECM	LOC	SUMMARY OF MODIFICATIONS		EXECUTED	CHECKED	RELEASED	DATE	VER
		EXECUTED	HYBRISUSER	THREE PH. MOTOR W22 IE3						
		CHECKED		FRAME 132M/L IP55 TEFC						
		RELEASED								
		REL. DATE								

- Sealing - oil seal ring
- Bearing cap
- Thermal protection to switch off - thermistors 155°C
- Color RAL 5009
- Painting plan 207A
- Mounting B5T



				THREE PH. MOTOR W22 IE3		PREVIEW			
				FRAME 132M/L IP55 TEFC		WDD 00			
						SHEET 1 / 1			