DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer	: ASTRAPROM
Product line	: W22 - IE3 Premium Efficiency Multivoltage
Product code	: 12883123

Frame	: 132M/L	Locked rotor time	: 9 s (hot) 16 s (cold)
Output	: 10.5 kW (14.3 HP)	Duty cycle	: S1
Poles	: 4	Ambient temperature	: -20 °C to +40 °C
Frequency	: 60 Hz	Altitude	: 1000 m.a.s.l
Rated voltage	: 440 V	Protection degree	: IP55
Rated current	: 17.7 A	Cooling method	: IC411 - TEFC
L. R. Amperes	: 152 A	Mounting	: B3R(E)
LRC	: 8.6	Rotation[1]	: Both
No load current	: 7.50 A	Noise level[2]	: 58 dB(A)
Rated speed	: 1760 rpm	Starting method	: Direct On Line
Slip	: 2.22 %	Approx. weight[3]	: 82.0 kg
Rated torque	: 5.81 kgfm	Design	: N
Locked rotor torque	: 240 %		
Pull up torque	: 215 %		
Breakdown torque	: 330 %		
Insulation class	: F		
Service factor	: 1.00		
Moment of inertia (J)	: 0.0698 kgm²		

Output	50%	75%	100%
Efficiency (%)	91.3	91.5	91.5
Power Factor	0.69	0.80	0.85

Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

	Drive end	Non drive end
Bearing type	6308-ZZ	6207-ZZ
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	POLYUREA BASED GREASE	

Foundation loads
Max. traction : 314 kgf
Max. compression : 396 kgf

Notes:
Naval Certification Organism: NOT APPLICABLE
Naval Service: NOT APPLICABLE

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
10.52	9.46	9.09	4.96	3.75	2.50	1.85

Standards

Specification	: IEC 60034-1	Vibration	: IEC 60034-14
Test	: IEC 60034-2	Tolerance	: IEC 60034-1
Noise	: IEC 60034-9		


This revision replaces and cancel the previous one, which must be eliminated..
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +0dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.
(4) At 100% of full load.


These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in IEC 60034-1.


Rev.	Changes Summary	Performed	Checked	Date
				2026/11/03

Performed by				
Checked by			Page	Revision
Date	2026/11/03		1/1	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

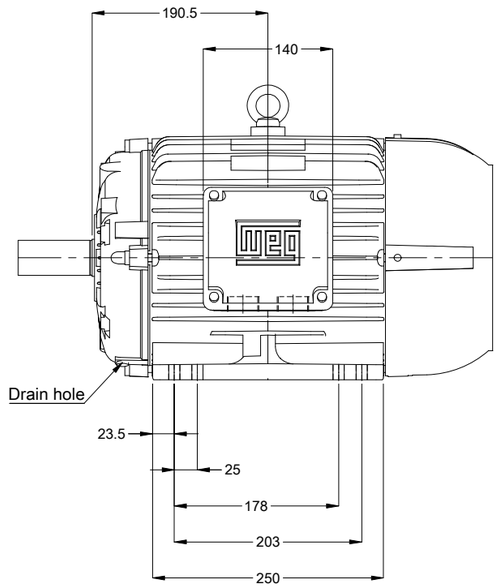

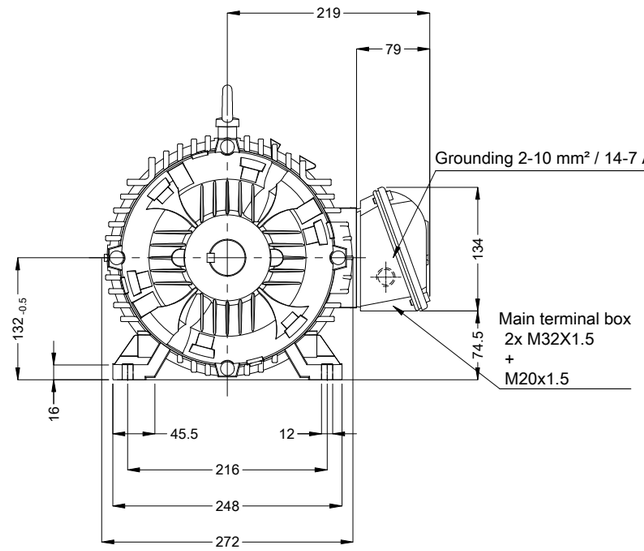

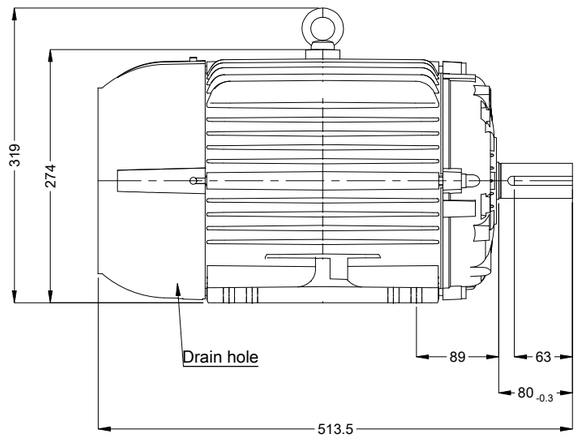


Thermal protection to switch off - thermistors 155°C

Color RAL 5009

Painting plan 207A

Mounting B3R(E)

DE Shaft End



DM12 WEG WPR-7339

9.2 kW 04 Poles 50 Hz | A

Scale 2 : 13

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER
CHECKED	
RELEASED	
REL. DATE	

THREE PH. MOTOR W22 IE3

FRAME 132M/L IP55 TEFC

PREVIEW

WDD 00

SHEET 1 / 1

Dimensions in mm

A3

WEG's property. Forbidden reproduction without previous authorization.