



FAG

NJ311-E-XL-TVP2




Cylindrical roller bearing

Schaeffler ID:
0167363460000Cylindrical roller bearing NJ..-E-XL-TVP2,
with cage, single row, semi-locating
bearing, 2 ribs on outer ring, 1 rib on inner
ring, type NJ

X-life

Technical information

Dimensions

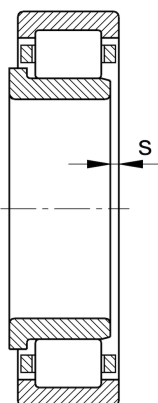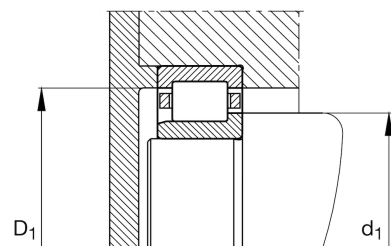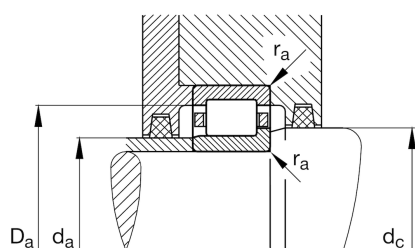

r_{\min}	2 mm	Minimum chamfer dimension
$r_{1\min}$	2 mm	Minimum chamfer dimension
s	1,8 mm	Axial displacement
E	106,5 mm	Raceway diameter outer ring
F	70,5 mm	Raceway diameter inner ring
$D_{1\min}$	101,4 mm	Minimum rib diameter outer ring
d_1	77,5 mm	Maximum rib diameter inner ring
	1,48 kg	Weight

Main Dimensions & Performance Data

d	55 mm	Bore diameter
D	120 mm	Outside diameter
B	29 mm	Width
C_r	159.000 N	Basic dynamic load rating, radial
C_{0r}	139.000 N	Basic static load rating, radial
C_{ur}	25.500 N	Fatigue load limit, radial
n_G	8.000 1/min	Limiting speed
n_{gr}	5.500 1/min	Reference speed


Mounting dimensions

$d_{a\min}$	66 mm	Minimum diameter shaft shoulder
$d_{a\max}$	69 mm	Maximum diameter of shaft shoulder
$D_{a\max}$	109 mm	Maximum diameter of housing shoulder
$d_{c\min}$	80 mm	Minimum shaft shoulder
$r_{a\max}$	2 mm	Maximum recess radius

Additional information

HJ311-E

L-washer

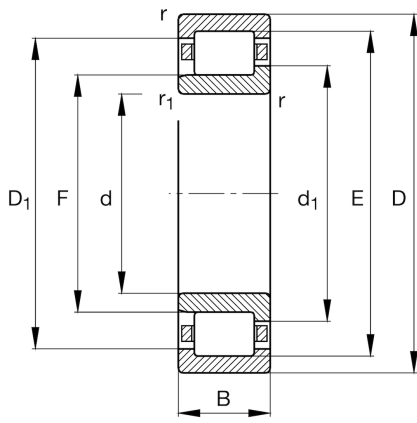**Temperature range**

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.