



Technical data

6208LLBC3/5K

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, non-contact seals on both sides

VISUAL (S)

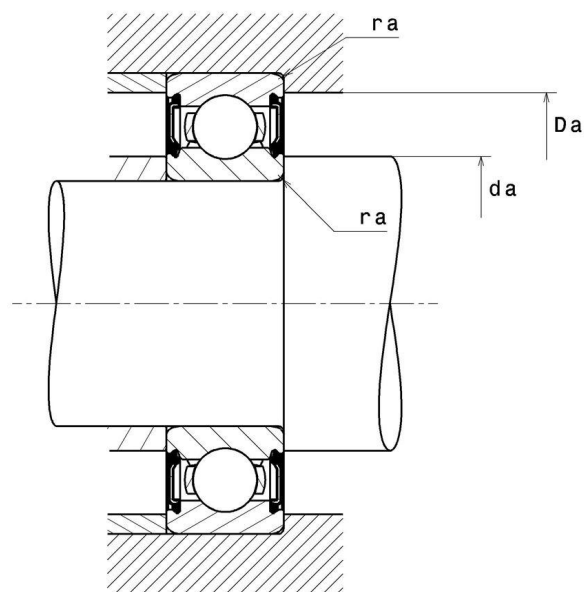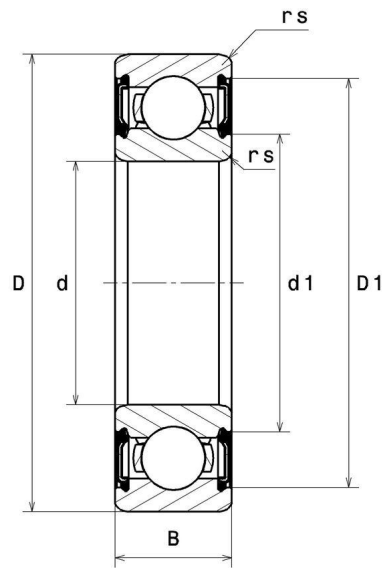

6208LLBC3/5K

Single row deep groove ball bearings

PRODUCT DIMENSIONS

Internal diameter d	40 mm
External diameter D	80 mm
Bearing/Inner ring width(B)	18 mm
Min fillet radius rs	1,1 mm
Radial clearance class	C3
Mass	0,366 kg
Brand	NTN

PRODUCT PERFORMANCE

Dynamic load, C	32,5 kN
Static load, C0	17,8 kN
Fatigue limit load, Cu	1,24 kN
Coefficient f0	14.0
Nlim (grease)	8700 tr/min
Min operating temperature, Tmin	-25 °C
Max operating temperature, Tmax	110 °C
Characteristic cage frequency, FTF	0.401 Hz
Characteristic rolling element frequency, BSF	4.841 Hz
Characteristic outer ring frequency, BPF0	3.607 Hz
Characteristic inner ring frequency, BRF1	5.393 Hz

ABUTMENT

Min shoulder diameter IR da min	46,5 mm
Max shoulder diameter IR da max	51 mm
Max shoulder diameter OR Da max	73,5 mm
Max shaft & housing fillet radius ra max	1 mm

6208LLBC3/5K

Single row deep groove ball bearings

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < F_r$, then use $P_0 = F_r$