

FAG

NJ2307-E-XL-TVP2




Cylindrical roller bearing

Schaeffler ID:
0167353580000Cylindrical roller bearing NJ..-E-XL-TVP2,
with cage, single row, semi-locating
bearing, 2 ribs on outer ring, 1 rib on inner
ring, type NJ

X-life

Technical information

Main Dimensions & Performance Data

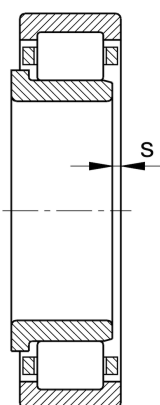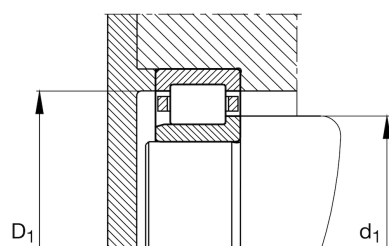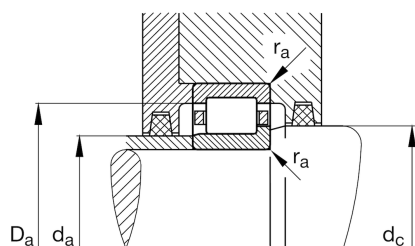

d	35 mm	Bore diameter
D	80 mm	Outside diameter
B	31 mm	Width
C _r	108.000 N	Basic dynamic load rating, radial
C _{0r}	98.000 N	Basic static load rating, radial
C _{ur}	17.700 N	Fatigue load limit, radial
n _G	12.600 1/min	Limiting speed
n _{gr}	6.600 1/min	Reference speed
	0,72 kg	Weight

Dimensions

d _{a min}	42 mm	Minimum diameter shaft shoulder
r _{min}	1,5 mm	Minimum chamfer dimension
d _{a max}	45 mm	Maximum diameter of shaft shoulder
r _{1 min}	1,1 mm	Minimum chamfer dimension
s	2,1 mm	Axial displacement
D _{a max}	71 mm	Maximum diameter of housing shoulder
E	70,2 mm	Raceway diameter outer ring
F	46,2 mm	Raceway diameter inner ring
D _{1 min}	66,6 mm	Minimum rib diameter outer ring
d _{c min}	53 mm	Minimum shaft shoulder
d ₁	51 mm	Maximum rib diameter inner ring
r _{a max}	1,5 mm	Maximum recess radius

Additional information

HJ2307-E	L-washer
----------	----------

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

