


Technical data

6312LLBC3/5K

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, non-contact seals on both sides

Visual(s)

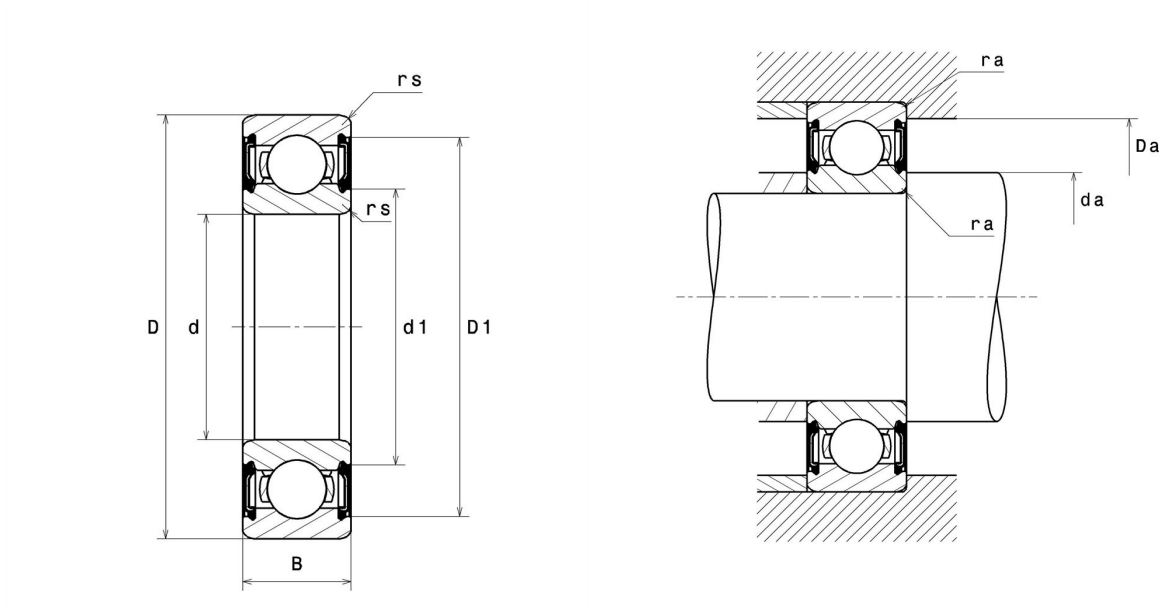

Product definition

d	60 mm
D	130 mm
B	31 mm
rs min	2.1 mm
Radial clearance class	C3
Mass	1.73 kg
Brand	NTN

Product performance

Dynamic load, C	82 kN
Static load, C0	52 kN
Fatigue limit load, Cu	2.36 kN
f0	13.2
Nlim (grease)	5,400 Tr/min
Min operating temperature, Tmin	-25 °C
Max operating temperature, Tmax	110 °C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	4.09 Hz
Characteristic outer ring frequency, BPF0	3.07 Hz
Characteristic inner ring frequency, BPIF	4.93 Hz

Abutment dimensions

da min	71 mm
da max	80.5 mm
Da max	119 mm
ra max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X ₀	Y ₀
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$