





Technical data

6317.C3

Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, open

Visual(s)

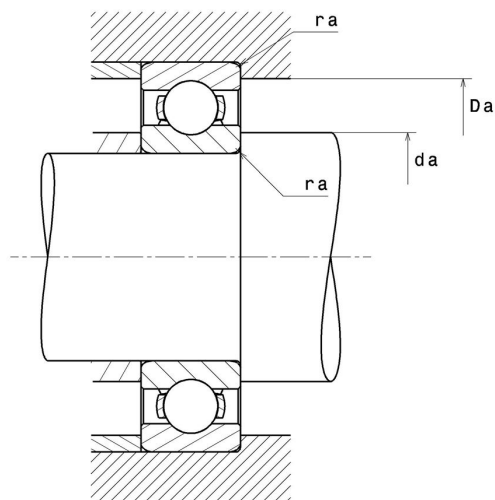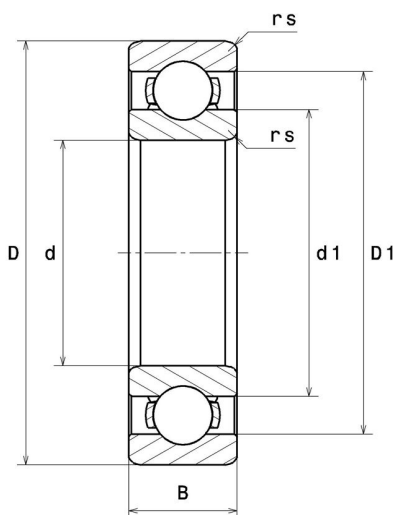

Product definition

d	85 mm
D	180 mm
B	41 mm
d1	106.4 mm
D1	158.4 mm
rs min	3 mm
Radial clearance class	C3
Mass	4.21 kg
Brand	SNR

Product performance

Dynamic load, C	132 kN
Static load, C0	96.8 kN
Fatigue limit load, Cu	3.8 kN
f0	13.3
Nref	5,300 Tr/min
Nlim	6,200 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.39 Hz
Characteristic rolling element frequency, BSF	4.16 Hz
Characteristic outer ring frequency, BPF0	3.09 Hz
Characteristic inner ring frequency, BPFI	4.91 Hz

Abutment dimensions

da min	98 mm
Ce min	0 mm
Da max	167 mm
ra max	2.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.Fr + Y.Fa$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.Fr + Y_0.Fa$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < Fr$, then use $P_0 = Fr$