

FAG

**NJ2217-E-XL-M1**

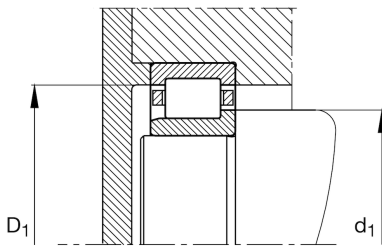
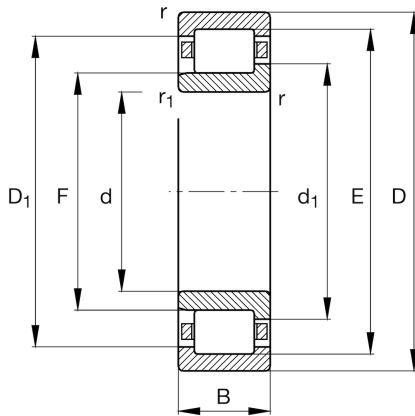
Cylindrical roller bearing

Schaeffler ID:  
0192235790000

Cylindrical roller bearing NJ..-E-XL-M1, with cage, single row, semi-locating bearing, 2 ribs on outer ring, 1 rib on inner ring, type NJ

X-life

## Technical information

**Main Dimensions & Performance Data**

d	85 mm	Bore diameter
D	150 mm	Outside diameter
B	36 mm	Width
$C_r$	255.000 N	Basic dynamic load rating, radial
$C_{0r}$	275.000 N	Basic static load rating, radial
$C_{ur}$	49.500 N	Fatigue load limit, radial
$n_G$	8.300 1/min	Limiting speed
$n_{gr}$	3.300 1/min	Reference speed
$\approx m$	2,78 kg	Weight

**Mounting dimensions**

$d_{a \min}$	96 mm	Minimum diameter shaft shoulder
$d_{a \max}$	99 mm	Maximum diameter of shaft shoulder
$D_{a \max}$	139 mm	Maximum diameter of housing shoulder
$d_{c \min}$	110 mm	Minimum shaft shoulder
$r_{a \max}$	2 mm	Maximum recess radius

**Dimensions**

$r_{\min}$	2 mm	Minimum chamfer dimension
$r_{1 \min}$	2 mm	Minimum chamfer dimension
s	1,3 mm	Axial displacement
E	136,5 mm	Raceway diameter outer ring
F	100,5 mm	Raceway diameter inner ring
$D_{1 \min}$	131,52 mm	Minimum rib diameter outer ring
$d_1$	107,45 mm	Maximum rib diameter inner ring

**Temperature range**

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	150 °C	Operating temperature max.

Additional information

HJ2217-E

L-washer

