





Technical data

2215SK

Double-row self-aligning ball bearings

Self-aligning ball bearing, pressed steel cage, tapered bore, open

VISUAL (S)

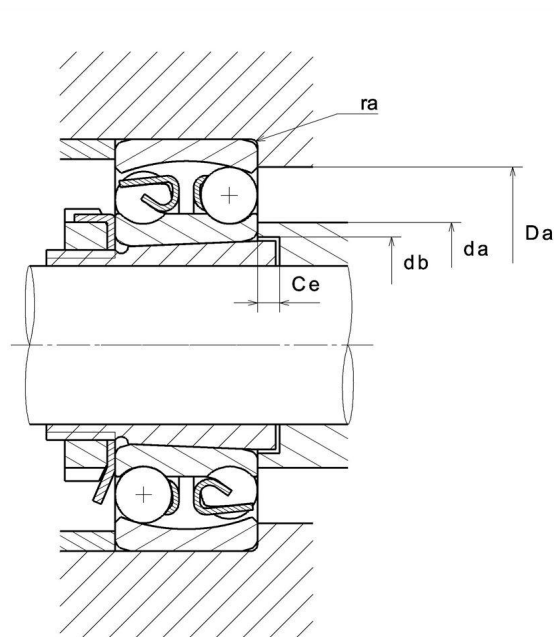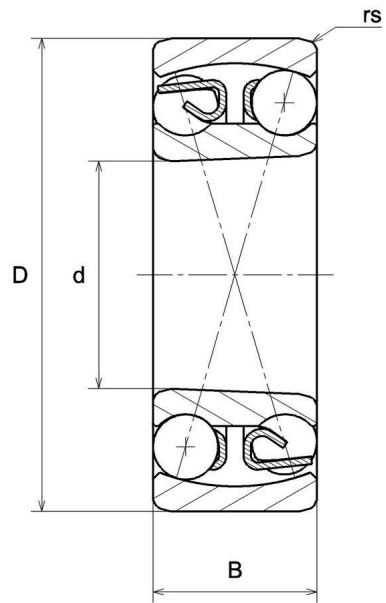

PRODUCT DEFINITION

Brand	NTN
d - Internal diameter	75 mm
D - External diameter	130 mm
B - Bearing/Inner ring width	31 mm
rs - Min fillet radius	1,5 mm
Associated sleeve reference	H315X
Radial clearance class	CN
Precision class	P0
Mass	1,6 kg

PRODUCT PERFORMANCE

C - Dynamic load	44,5 kN
C0 - Static load	17,8 kN
Cu - Fatigue limit load	1,2 kN
e - Coefficient	0.25
Y0 - Static axial load coefficient	2.6
Y1 - Lower axial load coefficient	2.5
Y2 - Upper axial load coefficient	3.9
Nlim - Oil lubrication limit speed	5300 tr/min
Nlim - Grease lubrication limit speed	4300 tr/min
Tmin - Min operating temperature	-20 °C
Tmax - Max operating temperature	120 °C

ABUTMENT

da min - Min shoulder diameter IR	83 mm
--	-------



2215SK

Double-row self-aligning ball bearings

ABUTMENT	
da max - Max shoulder diameter IR	93 mm
db - Min diameter for Sleeve	80 mm
Ce - Min length fro Sleeve	12 mm
Da max - Max shoulder diameter OR	122 mm
ra max - Max shaft & housing fillet radius	1,5 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15