


Technical information

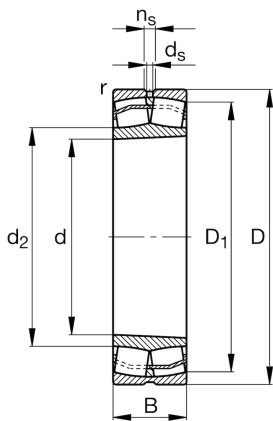

Main Dimensions & Performance Data


d	180 mm	Bore diameter
D	300 mm	Outside diameter
B	96 mm	Width
C_r	1.420.000 N	Basic dynamic load rating, radial
C_{0r}	1.950.000 N	Basic static load rating, radial
C_{ur}	199.000 N	Fatigue load limit, radial
n_G	2.230 1/min	Limiting speed
n_{gr}	1.350 1/min	Reference speed
	24,744 kg	Weight

Dimensions

r_{min}	3 mm	Minimum chamfer dimension
D_1	264,8 mm	Bore diameter outer ring
d_2	204,1 mm	Raceway diameter of the inner ring
d_s	8 mm	Diameter lubrication hole
n_s	15 mm	Width of lubricating groove

Mounting dimensions

$d_{a min}$	194 mm	Minimum diameter shaft shoulder
$D_{a max}$	286 mm	Maximum diameter of housing shoulder
$r_{a max}$	2,5 mm	Maximum recess radius
$B_{a min}$	8 mm	Minimum cavity width of the sleeve
$d_{a max}$	204 mm	Maximum diameter of shaft shoulder
$d_{b min}$	191 mm	Minimum cavity diameter of the sleeve

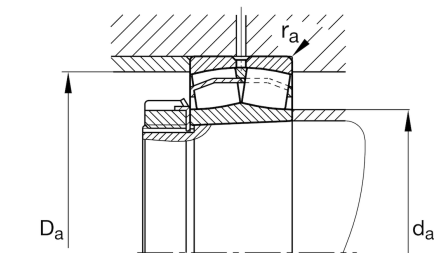

Calculation factors

e	0,29	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y ₁	2,32	Dynamic axial load factor
Y ₂	3,45	Dynamic axial load factor
Y ₀	2,26	Static axial load factor

Additional information

H3136	Adapter sleeve
AH3136A	Withdrawal sleeve

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.