





TOLLERANZE		
DOVE NON SIA		
DIVERSAMENTE		
SPECIFICATO		
FORI	(+): H 13	
ALBERI (-): h 13		
INTERASSI E	J 13	
RASAMENTI		
ANGOLI	: ±30°	
CONICITÀ	: ±0.05%	
FILETTATURE:		
Viti	: Sh 6	
Madreviti	: SH 8	

SOPRA	FORO	
FINO	H13 (+)	J 13
	Albero	
	h13 (-)	
0	0	± 0.070
3	0.140	± 0.070
6	0.180	± 0.090
10	0.220	± 0.110
18	0.270	± 0.135
30	0.330	± 0.165
50	0.390	± 0.195
80	0.460	± 0.230
120	0.540	± 0.270
180	0.630	± 0.315
250	0.720	± 0.360
315	0.810	± 0.405
400	0.890	± 0.445
500	0.970	± 0.485

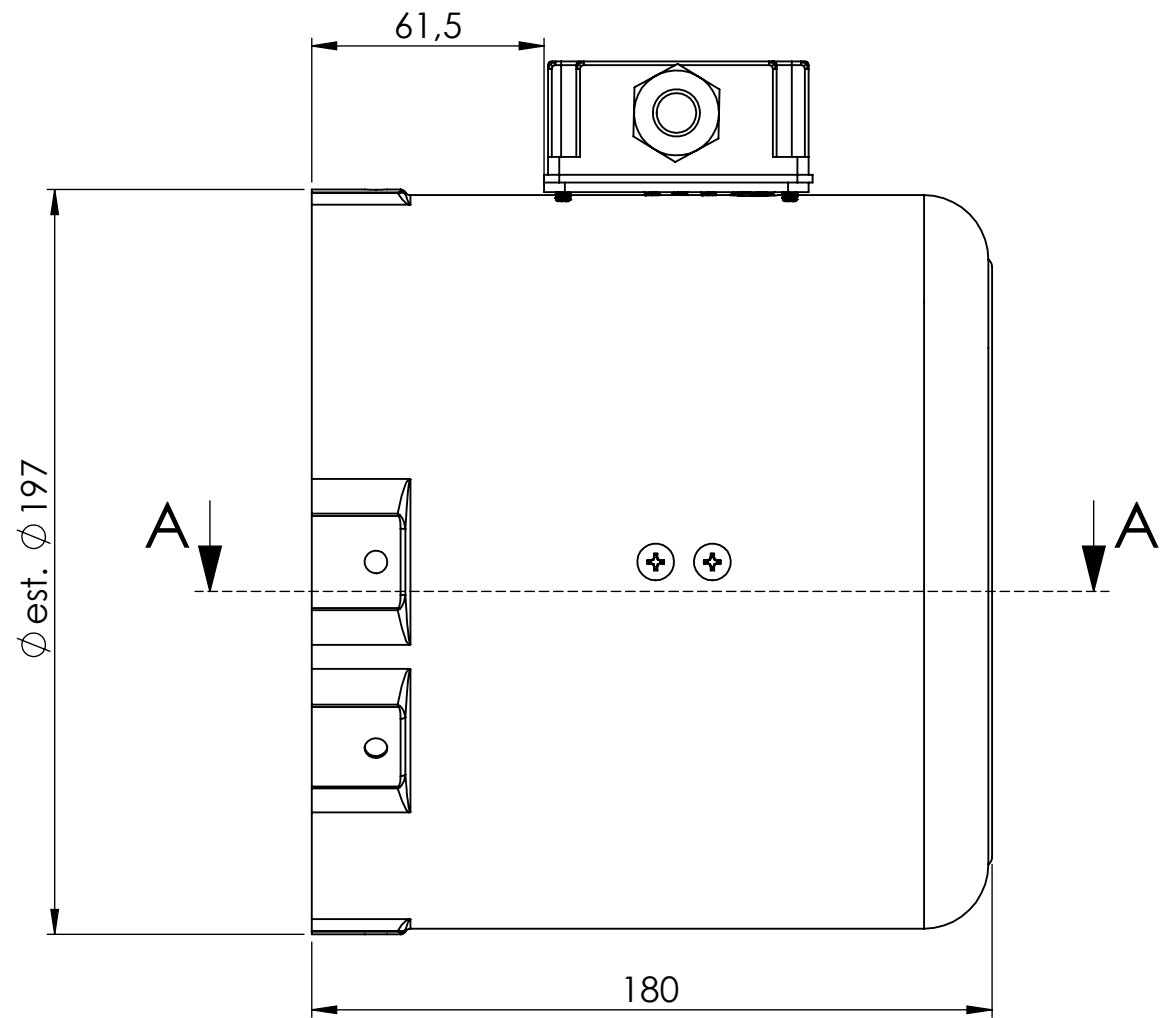

n°6 fori passanti Ø6mm/
n°6 through holes Ø6mm

A-A

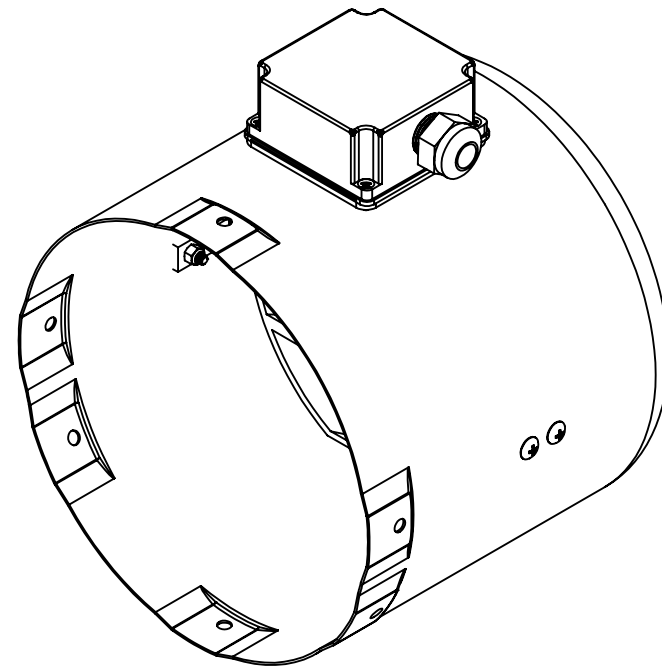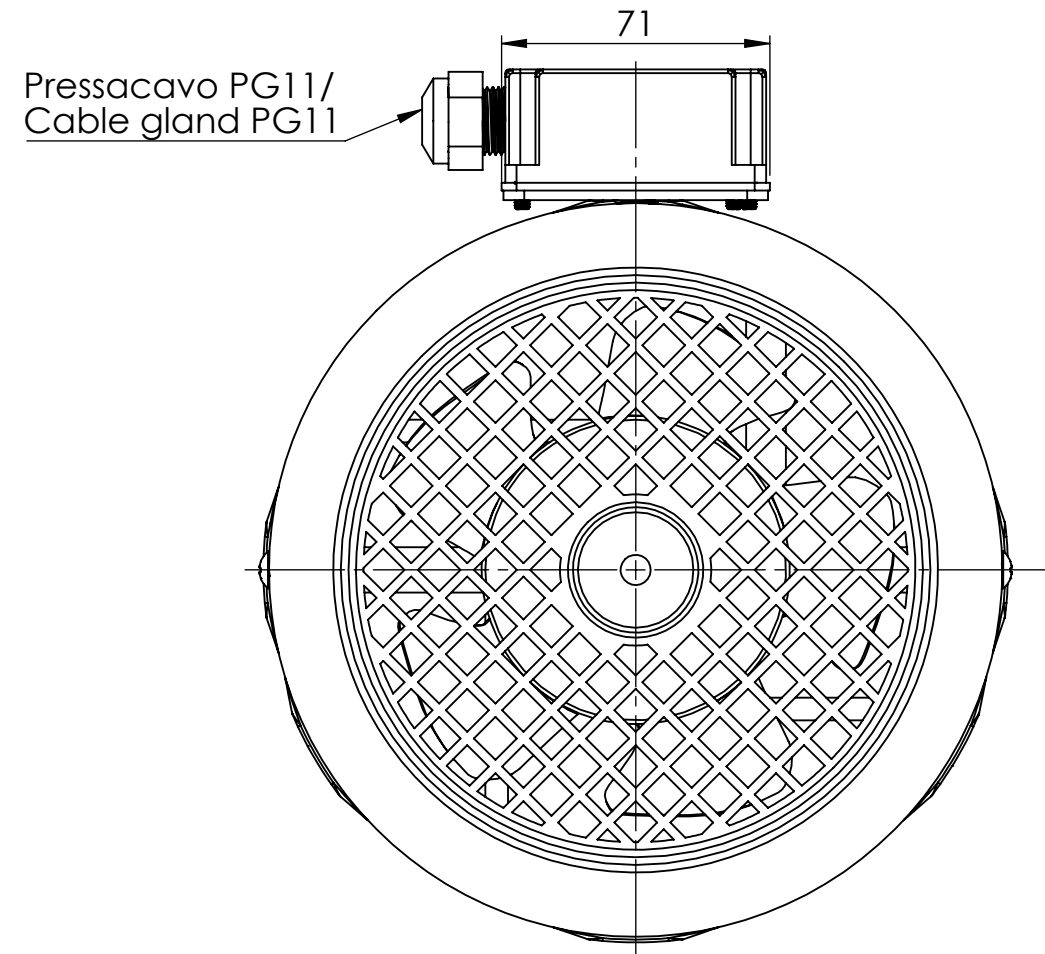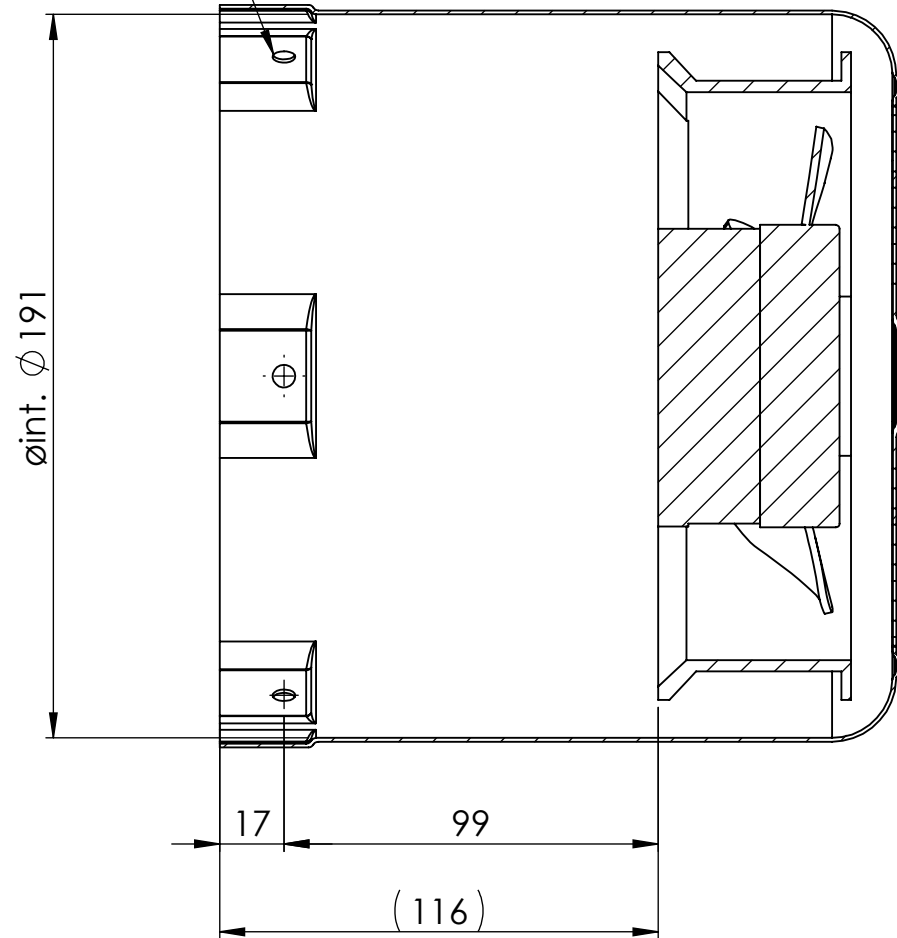

Rev.	Descrizione modifica:					Data	Firma	
Smussi generali		Raggi non quotati	Disegnatore G.S.	Data 18/01/2021	Scala 1:2	N° pezzi	Materiale	Tipo
Macchina o gruppo			Riferimento fornitore					Stato
 Via S. Ferrari 4 Campogalliano (MO) - ITALY			Denominazione KIT SERVOVENTILAZIONE TRIFASE JM 100 "6 FORI"					Dimensioni grezze
								Disegno n°